


ZSX-40

ZSX-40 气动卸荷阀 (溢流阀)

ZSX-40 Pneumatic Unloading (Relief) Valve

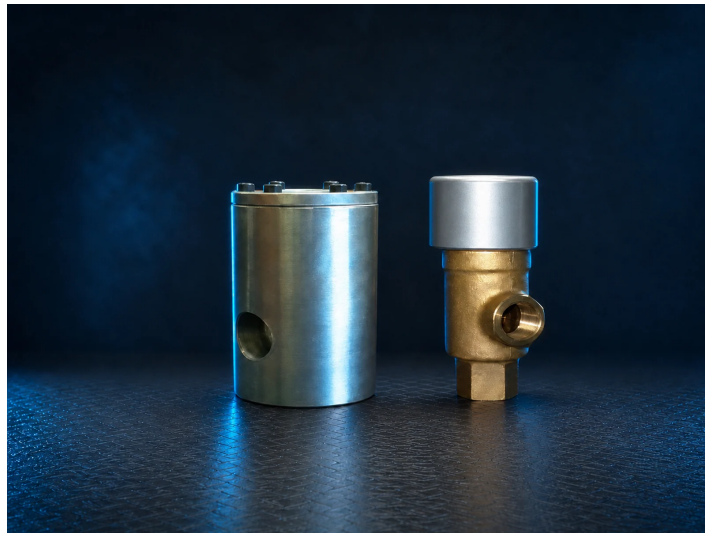

产品概述 / Product overview

产品册将 ZSX-40 标识为气动卸荷阀 (溢流阀)，列出水介质、4 MPa 工作压力、最高 65°C 工作温度，以及引导压力与流体压力约 1:5 的使用条件。

The catalog identifies ZSX-40 as a pneumatic unloading (relief) valve and lists water service, 4 MPa working pressure, a maximum operating temperature of 65°C, and a pilot-to-fluid pressure condition of approximately 1:5.

产品特点 / Product features

- 产品册提供法兰结构与螺纹结构实物图。
- 第 12 页列出 1 英寸规格和基本工作条件。
- 第 13 页分别给出 DN15–DN40 法兰尺寸，以及 ZG3/4、ZG1、ZG1-1/2 螺纹结构尺寸。
- 不将不同连接结构自动合并为同一 SKU。

The catalog shows both flanged and threaded constructions.

Page 12 lists a 1-inch specification and the basic operating conditions.

Page 13 provides flange dimensions for DN15–DN40 and threaded dimensions for ZG3/4, ZG1 and ZG1-1/2.

Different connection constructions are not automatically treated as one SKU.

工作参数 / Operating data

项目 Item	参数 Value
型号 Model	ZSX-40
规格 Catalog size	1 in
适用介质 Medium	水 Water
工作压力 Working pressure	4 MPa
工作温度 Operating temperature	≤65°C
使用条件 Operating condition	引导压力:流体压力≈1:5 Pilot pressure:fluid pressure ≈1:5

法兰连接尺寸 / Flanged connection dimensions

DN	L	D1	D2	D3	D4	b	z-d	f
15	120	φ51	φ55	φ75	φ105	16	4-φ14	4
20	120	φ51	φ55	φ75	φ105	16	4-φ14	4
25	120	φ58	φ65	φ85	φ115	16	4-φ14	4
32	200	φ76	φ85	φ110	φ145	16	4-φ18	4
40	200	φ76	φ85	φ110	φ145	16	4-φ18	4

螺纹连接尺寸 / Threaded connection dimensions

D	L	H
ZG3/4	130	100
ZG1	130	100
ZG1-1/2	150	135

应用场景 / Applications

用于产品册列明的水介质卸荷或溢流控制工况，具体连接结构按询价确认。

For catalog-listed unloading or relief control in water service, with the connection construction confirmed during RFQ.

选型提示 / Selection note

请在询价时提供型号、口径、接口、材质、介质、压力、温度、控制方式和数量；所有供货信息按单确认。

For RFQ, provide model, size, connection, material, media, pressure, temperature, control mode and quantity. Availability is confirmed per order.

资料来源 / Source: 新硫化机样册.pdf · The source PDF metadata dates the catalog to 2024. All products are RFQ-only; configuration, supply and lead time must be confirmed for each inquiry. · PDF pages 12–13